




This product must be installed by a qualified electrician in accordance with all national and local electrical and construction codes. Failure to comply with the installation instructions can result in serious injury or death.




1 Place MaxiLED Cable alongside Catenary Cable

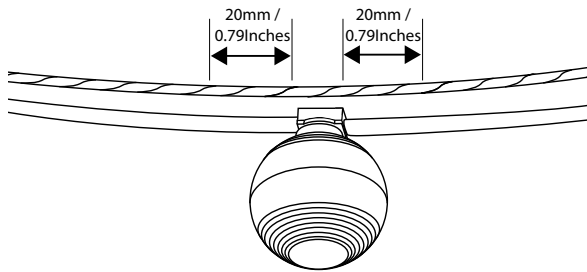

- (a). Make sure catenary cable is taut and secure.
- (b). Ensure the festoon cable is NOT twisted so that the Globes will remain in the correct orientation.
- (c). With the secure catenary cable above the MaxiLED Cable, measure 20mm / 0.79 inches either side of the MaxiLED housing.


2 Secure MaxiLED Cable

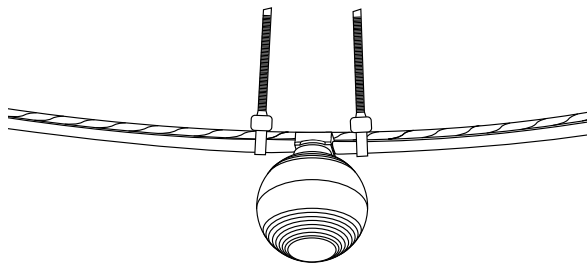

- (a). Using a suitable sized UV resistant zip tie, secure the MaxiLED Globe up against the catenary cable.


NOTE: Secure Zip Tie Leaving NO movement for MaxiLED cable to slide along the Catenary cable.

3 Repeat Procedure

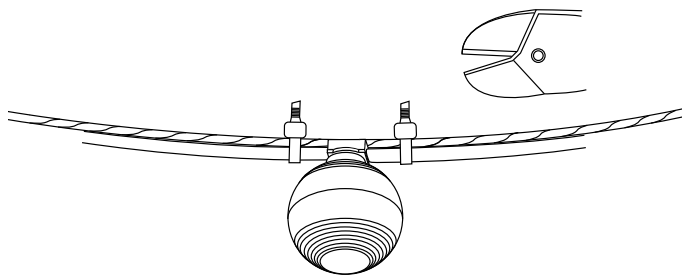

- (a). Repeat process 1-2 until the installation is complete.
- (b). Cut excess Zip Tie off.
- (c). Connect the installed unit to the correct transformer. **(SEE INSTALLATION INSTRUCTIONS FOR TRANSFORMERS.)**

4 Alternative Fixing Method

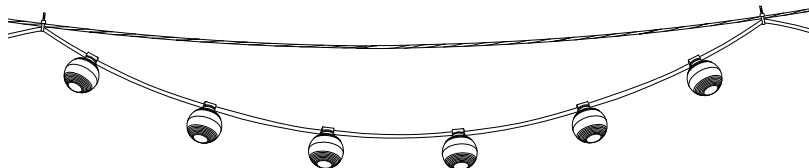

- (a). Creating a hoop effect, secure catenary cable above the MaxiLED Cable.
- (b). Repeat Steps 1, 2 and 3.