

## Key Features


- IP68 rating
- Data over Power - 2 Core cable
- Compact design
- 48VAC



MaxiLINK® is used to control (via DMX-512) and power MaxiLED RGBW products such as the Focal Facade Series, Globe Series, Marker Effects Series and Spotlight Series.

One MaxiLINK® includes a power supply as a completely wired kit. On the input side, a DMX signal cable from a third party DMX player or show design software and power (120/240 VAC) connect to the MaxiLINK®. Data and power (48VDC) are then output together to the MaxiLED RGBW products on one cable. A single MaxiLINK® controller is typically dedicated to an individual run (or strand).

## Dimensions

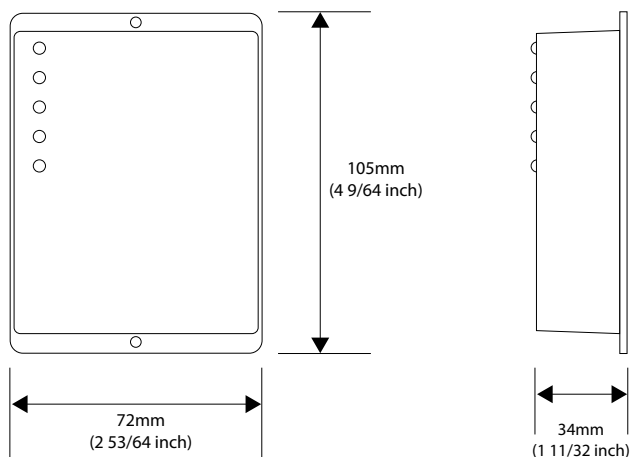

## Specifications

Power Input:	<b>48VAC Data Over Power MaxiLINK® system</b>
Power Output:	<b>350 Watts Max. Per circuit</b>
Data Input:	<b>DMX-512</b>
Length:	<b>105mm (4 9/64 Inch)</b>
Width:	<b>72mm (2 53/64 Inch)</b>
Depth:	<b>34mm (1 11/32 Inch)</b>
Fixing:	<b>2 Pre-drilled holes for fixing</b>
Protection:	<b>Short circuit. Open circuit. Over temperature</b>
Weight:	<b>400g (14.1oz)</b>
Connector:	<b>IP68 and self-locking</b>
Control:	<b>DMX512</b>
Operating Temperature:	<b>-25°C to +50°C (-13°F to +122°F)</b>
Listings:	<b>UL / cUL (Pending), CE</b>
Capacity:	<b>Each MaxiLINK® unit can control up to 100 RGBW control points (400 DMX channels) and power up to 305 ft (100m) of cable.</b>



UK Designed and  
Manufactured

## MaxiLED Lighting

Unit 2, Farrington Place, Rossendale Road Ind. Est. Burnley, Lancashire. UK. BB11 5TY

T: +44 (0)845 8732 601 F: +44 (0)845 8732 602

E: [sales@maxiledlighting.com](mailto:sales@maxiledlighting.com) Web: [www.maxiledlighting.com](http://www.maxiledlighting.com)