




— ECO LINE · MAXI DEPTH ECO SMALL

Maxi Depth ECO / Small

A compact recessed in-ground luminaire with adjustable optical angle for façade grazing, tree and feature uplighting. 6 × high-power LEDs, CRI ≥ 90, supplied with a mounting sleeve. White 3000K 7 W (DALI) or RGBW 9 W (DMX512).

- IN-GROUND
- IP67
- IK09
- DALI / DMX512
- CRI ≥ 90

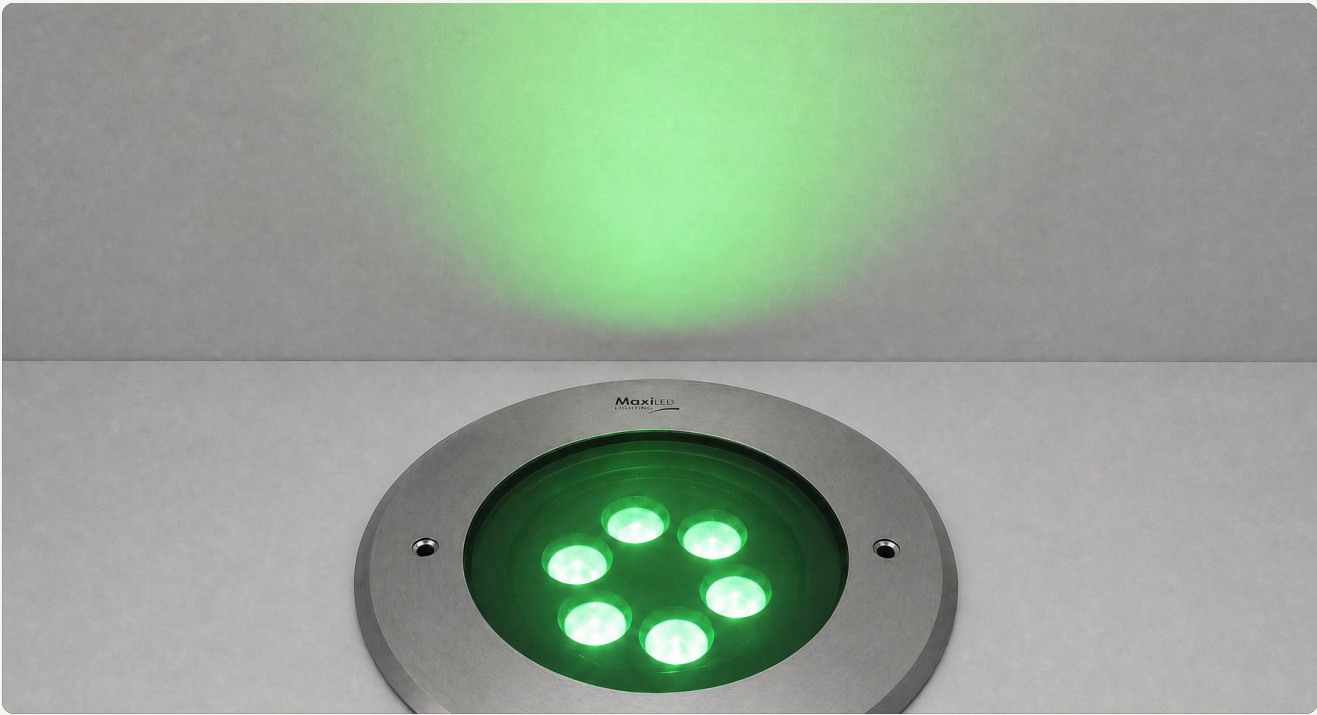

POWER	BEAM	COLOUR	IP RATING	CONTROL
7 / 9 W	Adjustable	3000K White 7 W · RGBW 9 W	IP67	DALI / DMX512

SPECIFICATIONS · OVERVIEW · KEY FEATURES

QUICK SPECIFICATIONS

SUPPLY	DC 24V
POWER	7 / 9 W
LED	6 × LED
COLOUR	3000K White 7 W · RGBW 9 W
CRI	≥ 90 (White)
BEAM	Adjustable
CONTROL	DALI / DMX512
IP RATING	IP67
IMPACT	IK09
HOUSING	Black + Silver

OVERVIEW

A compact recessed in-ground luminaire with adjustable optical angle for façade grazing, tree and feature uplighting. 6 × high-power LEDs, CRI ≥ 90, supplied with a mounting sleeve. White 3000K 7 W (DALI) or RGBW 9 W (DMX512).

KEY FEATURES

- 01

Adjustable optical angle

Aim the beam after installation — façade grazing, tree trunks or feature uplighting from one flush fitting.
- 02

Flush, sealed, sleeved

Recessed body supplied with a mounting sleeve; IP67 sealed and IK09 impact-rated.
- 03

6 × LED, CRI ≥ 90

High-quality LEDs with ≥ 90 colour rendering on the White version.
- 04

White or RGBW

White 3000K 7 W on DALI, or RGBW 9 W on DMX512.

— APPLICATIONS · MOUNTING

Applications and mounting.

APPLICATIONS

- 01

Façade grazing & wall washing
Recessed uplighting that grazes facades and walls.
- 02

Tree & feature uplighting
Uplight trees, sculptures and architectural features.
- 03

Pathways & landscape
Flush, walkable uplighting for paths and landscape.
- 04

Driveways & public spaces
Sealed, impact-rated for trafficked areas.

Note. Installation must be carried out by a qualified electrician per local electrical and construction codes. Remote driver not included.

MOUNTING & CONTROL

Recessed in-ground with the supplied mounting sleeve; adjustable optical angle set after installation. IP67 sealed, IK09 impact-rated. Supply DC 24V from a remote driver; DALI White or DMX512 RGBW.