



The ZEON FIN Series blends elegance, innovation, and visual comfort into a compact 10x10mm top view mini luminaire. This masterpiece delivers vibrant, uniform mono white light with a sophisticated tunable white feature, seamlessly adjusting from 2400K to 5000K, ensuring a versatile and inviting ambiance. With a CRI of ≥ 90 and a robust IP67 rating, it's the perfect solution for both indoor and outdoor applications.


Designed for upscale residential havens, prime commercial spaces, and high-end luxury retail brands, the ZEON FIN Series offers you the best choice to elevate your vision with timeless appeal and unmatched quality.

Our zone of interest is to provide our utmost quality of light with this versatile range for your design intent. What's your zone of interest? Share it with us!




Product Information

Power Consumption	2x8W/m
Supply Voltage	24V DC
Max Load (Connection In Series)	6m
CRI Rating	≥ 90
Luminous Flux@2400K	115.1 lm
Luminous Flux@5000K	132 lm
Lumen Efficacy@2400K	14.4 lm/W
Lumen Efficacy@5000K	16.5 lm/W
Dimensions	10 x 10mm
Color Temperature CCT	2400-5000K
IP Rating	IP67
Bending Radius	R>50mm
Cut Unit	50mm
Bending Direction	Top View
Storage Temperature	-30°C to 60°C
Operation Temperature	-25°C to 45°C

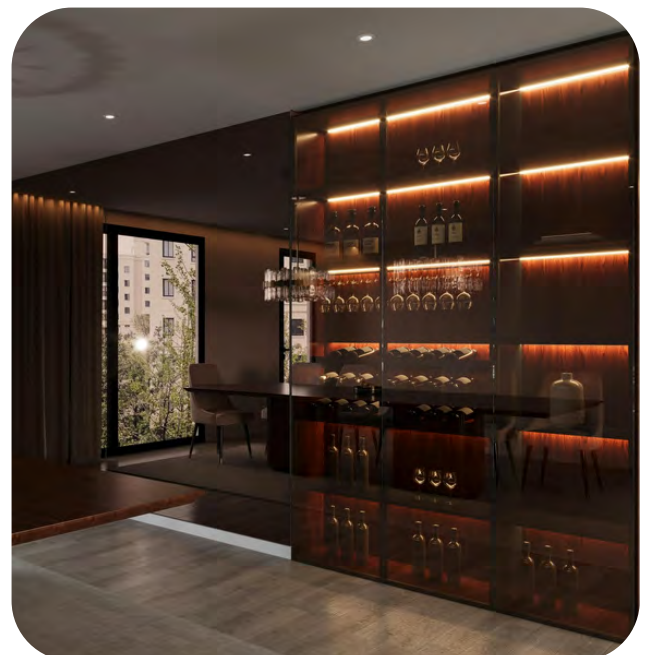


Due to continuous improvements, the information herein may be changed without notice

Technical Drawing

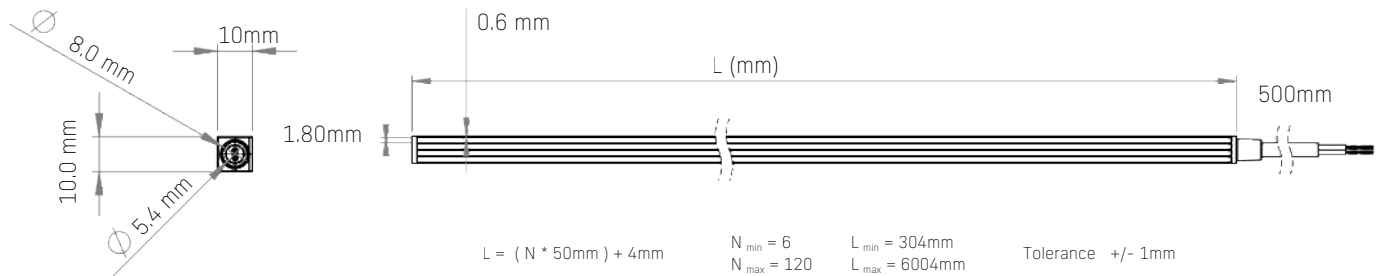


Mounting Accessories

Aluminium



Stainless Steel



Clip



Length:
20mm
ZNA20

Channel



Length: 1000mm
ZNA1000
Length: 2000mm
ZNA2000

Clip



Length:
30mm
ZNS30

Flexi Channel



Length: Standard 1000mm
Other on request
ZNSFX

Photometric Data

Lumen Efficacy

14.4 Lumen/Watt

Lumen Efficacy

16.5 Lumen/Watt

Color Rendering Index

CRI: 91.9

Color Rendering Index


CRI: 92.9

Color Temperature


2469K

Color Temperature


5262K

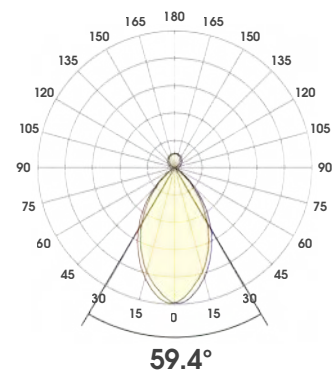

Cable Entry




Straight Entry



Bottom Entry



Left Side Entry



Right Side Entry

