



The ZEON SEALED redefines sophistication and durability with its sleek 15x15mm mini luminaire design. Delivering a radiant, uniform mono white 3000K output, this advanced lighting solution is crafted for premium architectural detailing—enhanced by innovative 3D bending for seamless flexibility in both vertical and horizontal directions. With CRI 90+ and a robust IP67 rating, ZEON SEALED excels across demanding indoor and outdoor environments where performance and aesthetics must remain uncompromised.

At the heart of ZEON SEALED is its next-generation sealed louver structure. Unlike conventional fins, the louver gaps are fully filled and sealed, preventing water and dust from accumulating between louvers. This detail protects the luminaire's appearance over time, reduces maintenance, and ensures long-lasting reliability—keeping the product looking clean, refined, and "project-ready" long after installation.


Crafted for luxurious residential retreats, premium commercial settings, and elite retail showcases, the ZEON SEALED offers the ultimate choice to elevate your design with enduring elegance, ultra protection, and superior quality of light.

Our zone of interest is to provide the highest quality of light with ultra protection and glare control in mind. What's your zone of interest? Share it with us!




Product Information

Power Consumption	12W/m
Supply Voltage	24V DC
Max Load (Connection In Series)	4m
CRI Rating	≥90
Luminous Flux	255 lm
Lumen Efficacy	25.5lm/W
Dimensions	15 x 15mm
Color Temperature CCT	3000K
IP Rating	IP67
Vertical Bending Radius	R>50mm
Horizontal Bending Radius	R>75mm
Cut Unit	55.6mm
Bending Direction	3D
MacAdam Ellipse	1 SDCM
Storage Temperature	-40°C to 60°C
Operation Temperature	-40°C to 55°C

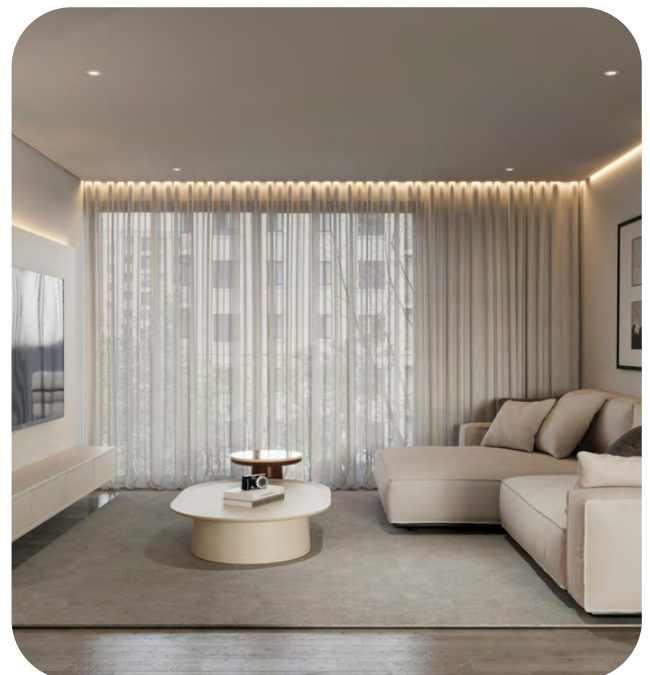


Due to continuous improvements, the information herein may be changed without notice

Technical Drawing

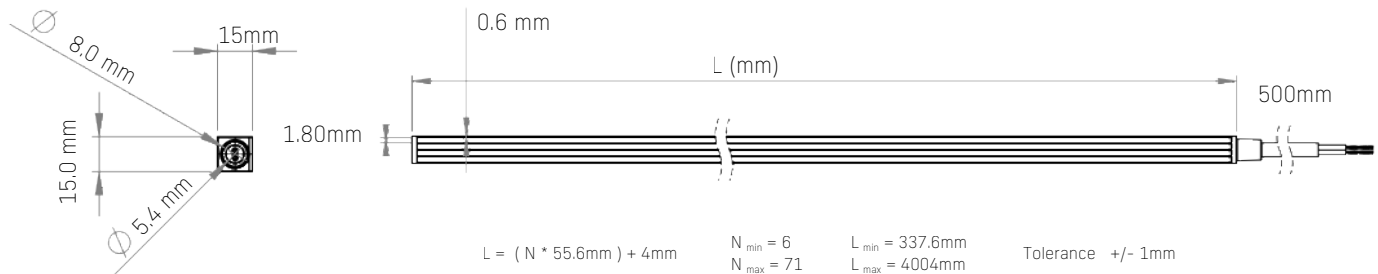


Mounting Accessories

Aluminium



Stainless Steel



Clip



Length: 20mm
ZNA1515

Channel



Length: 1000mm
ZNA1515-1000

Clip



Length: 30mm
ZNS1515

Flexi Channel



Length: Standard 1000mm
Other on request
ZNS1515

Photometric Data

Lumen Efficacy


25.5 Lumen/Watt

Color Rendering Index


CRI: 92.9

Color Temperature


2897

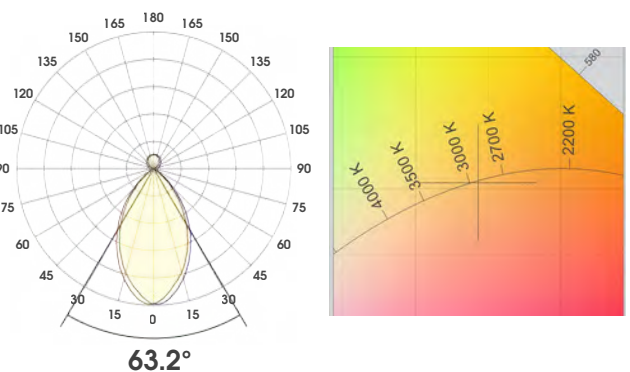

Cable Entry




Straight Entry



Bottom Entry



Left Side Entry



Right Side Entry

